

High Capacity Pad Lift



Shown: VLXS10
 10,000 lbs. capacity
 low-rise lift

The VLXS10 is your solution for quick service operation on today's passenger cars and trucks up to 10,000 lbs. Tire and brake work can now be performed on a wider variety of vehicles, thanks to the newly designed pads and adapters, wider drive-over capability and increased lifting capacity.

The pad and adapter combinations allow lifting of uni-body and frame contact undercarriages — reaching recommended manufacturers pick-up points on most vehicles on the road today.

Trucks and SUVs that require a wider drive-over capability will not be turned away. The VLXS10 has ramps and side drive-over areas to accommodate wider wheelbase vehicles.

The 10,000 lbs. capacity offers the ability to lift the heavier vehicles being sold today. The VLXS10 is truly the heavy-weight winner when comparing mid and low-rise lifts.



ROTARY LIFT
 The World's Most Trusted Lift™




A DOVER COMPANY

Features

- Drive-over ramps and side rails provide the width to support wider vehicles during approach.
- Dual lifting cylinders provide the power required to lift a 10,000 lbs. vehicle.
- Includes four heat-resistant non-slip pads which provide a great contact surface for adapters or vehicle pick-up points.
- VLXS series VersaLifts come standard with a three-position wheel spotting dish for accurate spotting of vehicles.
- 7,000 and 10,000 lbs. capacity models are available.

VLXS10 Adapters

The new three-position adapters have rubber contact pads on three sides increasing the positioning capabilities. The height added by these adapters excels the versatility of the lift. The adapters can be laid flat for 4 5/16" (110mm) additional height or on the side for 6 5/16" (160mm). Achieve maximum extension by laying the adapter on end and allowing an additional 8 9/16" (218mm) of height. The VLXS10 also comes with a set of four 1 1/2" rubber block adapters for low-profile vehicles.



Shown: three-position adapter in mid-step

VLXS7 Adapters

The 7,000 lb. capacity low-rise lift comes standard with a set of rubber blocks for quick access to lower profile and unibody frame vehicles. Blocks are 1 1/2" and 3" in height.




Shown: 1 1/2" and 3" rubber blocks for VLXS7



Shown: VLXS7 7,000 lbs. capacity low-rise lift

Model:	VLXS10	VLXS7
Rise High Step/Tall Pad	30 5/16" (770mm)	24 3/4" (629mm)
Rise Mid Step	28 1/16" (713mm)	N/A
A. Rise Low Step	26 1/16" (662mm)	N/A
Rise Short Pad	23 1/4" (587mm)	23 1/4" (587mm)
Rise Flat	21 3/4" (552mm)	21 3/4" (552mm)
B. Length Overall	90 1/2" (2299mm)	90 1/2" (2299mm)
C. Width Overall	78 1/2" (1994mm)	78 1/2" (1994mm)
D. Width Between Platforms	22 3/4" (578mm)	22 3/4" (578mm)
E. Length of Platform	51 1/4" (1299mm)	51 1/4" (1299mm)
F. Length of Pad	17" (432mm)	17" (432mm)
G. Outside Width Of Platforms	70 3/4" (1797mm)	70 3/4" (1797mm)
Horizontal Movement (during rise)	16" (406mm)	16" (406mm)
Collapsed Height	4" (102mm)	4" (102mm)
Locking Leg Heights	13 3/8" (340mm) 17 3/8" (441mm) 21 3/8" (543mm)	13 3/8" (340mm) 17 3/8" (441mm) 21 3/8" (543mm)
Lifting Capacity	10,000 lbs. (4536kg)	7,000 lbs. (3175kg)
Voltage Single Phase	115v	115v
Time of Full Rise	40 seconds	40 seconds

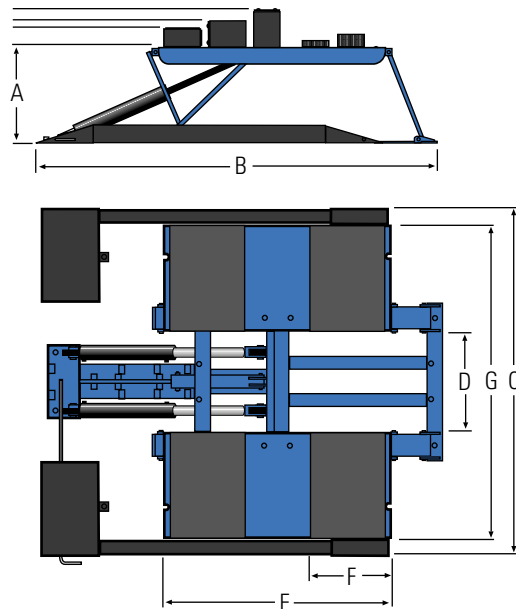

Lifts are available in blue and red only.
Ceiling height required equals rise plus height of tallest vehicle.

Rotary World Headquarters

2700 Lanier Drive
Madison, IN 47250, USA
www.rotarylif.com

North America Contact Information

Sales: p 800.640.5438
f 800.578.5438
e userlink@rotarylif.com
Tech. Support: p 800.445.5438
f 800.822.6502
e userlink@rotarylif.com

World Wide Contact Information

World Headquarters/USA: 1.812.273.1622
Canada: 1.905.812.9920
European HQ/Germany: +49.771.9233.0
United Kingdom: +44.178.747.7711
Australasia: +60.3.7660.0285
Latin America/Caribbean: 1.812.273.1622
Middle East/Northern Africa: +49.771.9233.0
Southern Africa: 1.812.273.1622

