



**ENGINEERED TO PERFORM. BUILT TO LAST.**

Reliable lift systems for independent repair shops, car dealerships, bodyshops, home enthusiasts, and heavy-duty truck facilities.



FWD I10N400MBL

# I·10

**LIGHT DUTY TWO POST LIFT**  
10,000 lbs. Capacity

**FEATURES:**


- Symmetrical column design
- Spot-Rite™ 3-stage front arm design
- spot vehicles asymmetrically or symmetrically
- Top mounted Direct-Pull lifting technology
- Cylinder rod concealed in carriage
- Adjustable width options
- Optional extended height kit adds 2'
- Single point lock release
- Powder coated finish
- Includes adapter storage bracket
- ALI Certified

**INCLUDES LOW-PROFILE THREADED ADAPTERS AND (4 each) ADAPTER EXTENSIONS AT 3.5" and 5"**



**Spot-Rite™ 3-Stage Front Arm Design**

accommodates vehicle spotting both symmetrically and asymmetrically. Position the vehicle doors in front of or behind the lift columns to prevent door damage and allow easy technician access!

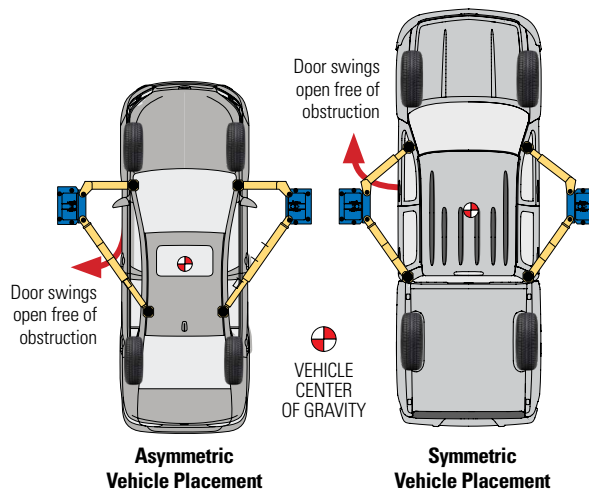


Forward Lifts meet the highest industry safety and performance standards. Your assurance of certification is the gold ALI/ETL certified label.



**T100295 Extended Height Kit**

The column extension kit is used to add an additional 2 feet (609.6 mm) to the top of the standard lift. This kit includes an extended length hose, return line, and cables to accommodate the extended height. Existing hardware included with the lift is used to attach the extensions.

This kit can be used on the current 400 series model i10 Forward Two Post Lifts.



996 Industrial Drive  
Madison, IN 47250

Phone: 800.423.1722  
Fax: 812.273.7329



[www.forwardlift.com](http://www.forwardlift.com)



Lit# Forward i10 CUTSHEET.2021.02 ©2021 Vehicle Service Group™ All rights reserved.

Unless otherwise indicated, Forward Lift, Vehicle Service Group™, Dover and all other trademarks are property of Dover Corporation and its affiliates. Printed in the U.S.A.

| SPECIFICATIONS          | I10N400MBL/RD*  |
|-------------------------|---|
| Capacity                | 10,000 lbs. (4535kg)  |
| Maximum rise            | 76 - 1/4" (1937mm) w/5" extension   |
| Overall Height**        | 143" or optional 167" (3632mm/4241mm)   |
| Overall Width           | 131" or optional 137" (3327mm/3480mm)   |
| Drive through clearance | 99" (2515mm) or optional 105" (2667mm)  |
| Overhead switch height  | 137-5/8" (3496mm)   |
| Front reach (Min/Max)   | 23" / 44-3/8" (584mm/1127mm)  |
| Rear reach (Min/Max)    | 36" / 58" (914mm/1473mm)  |
| Min/Max adapter height  | 3-3/4" (95mm) w/o adapter extension<br>8-3/4" (222mm) w/ 5" adapter extension |
| Width inside column     | 109" or optional 115" (2769mm/2921mm)   |
| Voltage/ Amps           | 208V/230V, 17 amps  |
| Motor/Phase             | 1ph/2HP/60Hz  |
| Ceiling height required | 144" (3658mm)   |

\*Lifts available in blue and red \*\*With T100295 Extended Height Kit Specifications subject to change without notice or liability.