



SPOA10-AV

WITH ALL-VEHICLE
(AV) LIFT ARMS

INTRODUCING
**THE ONE LIFT
TO SERVICE
THEM ALL.**



MODEL SHOWN:
SPOA10N20MOBL



MODEL SHOWN:
SPOA10N20MORD

Introducing the next evolution in vehicle lift technology. The industry's original & best-selling asymmetrical lift now features Rotary's patent-pending, revolutionary **ALL-VEHICLE LIFT ARMS.**



ELEVATING THE FUTURE OF LIFT TECHNOLOGY

SIMPLY. LIFTING. EVERYTHING.

ULTIMATE LIFTING VERSATILITY

With the shortest arm retraction and largest pickup range of any two-post lift, Rotary's AV lift arms simplify your shop and give technicians the flexibility and clearance needed to service any vehicle.

EASY SPOTTING & POSITIONING

Rotary's new AV Arms allow you to properly lift any vehicle on recommended OEM pickup points. Get more vehicles in the shop and on the lift faster with easy spotting and superior lifting capabilities.



You won't have to turn away business with Rotary's new, revolutionary AV Arm design!



SCAN TO VIEW
PRODUCT VIDEO

THE HIGHEST CAPACITY LOW-PROFILE LIFT AVAILABLE

With the industry's lowest profile arm height available of any 10,000 lb. capacity two-post lift, technicians can easily spot lower profile vehicles with worry.

THE LOWEST ADAPTER HEIGHT IN THE INDUSTRY

The outer arm and adapter height are the same measurement reducing any possibility the arm makes contact with vehicle underbodies.

The adjustable, low adapter height allows the needed reach to easily spot, lift and repair unibody, exotic and battery electric vehicles.



3 3/8" MINIMUM
ADAPTER HEIGHT

Reach small, specific pick-up points on EVs with the needed clearance to remove propulsion batteries.



THE ONLY LIFT YOU NEED.

20% MORE REACH

THAN 3-STAGE ARMS WITH THREAD-UP ADAPTERS


30% LARGER ARM SWEEP

THAN CONVENTIONAL 2-STAGE ARMS WITH FLIP-UP ADAPTERS

Shortest arm retraction in the market by up to 9"

PATENT-PENDING ALL-VEHICLE ARMS

Innovative design streamlines the arm for a simpler fine adjustment of the adapter while maintaining maximum reach and retraction. Engineered, high-strength tapered arm design allows for easier, faster positioning of adapters compared to traditional arm designs.

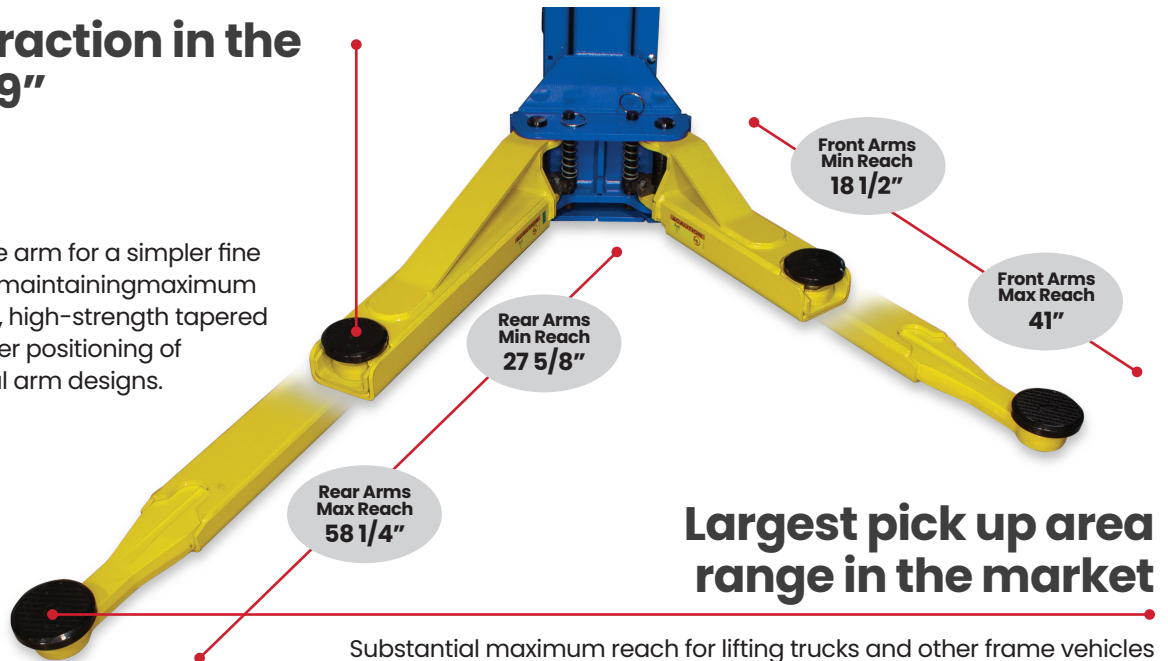

Largest pick up area range in the market

Substantial maximum reach for lifting trucks and other frame vehicles

Comes standard with adjustable round, truck & stackable adapter extensions

Include two sets (four each) of 3 1/2" and 5 1/4" stackable adapter extensions with storage rack.



ROUND ADAPTERS

For lifting unibody and battery electric vehicles.

Set of four polymer pad round adapters thread-up to allow protection of vehicle underbody components or undercoating for no metal on metal contact.



TRUCK ADAPTERS

For use on framed vehicles.

Set of four adjustable thread-up adapters with rubber pads for protection of underbody vehicle components or undercoating.





MODEL SHOWN:
SPOA10N20M0BL



FEATURES & SPECIFICATIONS
ACCOMMODATE ALL VEHICLE TYPES UNDER 10,000 LBS.

True asymmetrical rotated column design

Service a broader range of vehicles with one innovative ALL-VEHICLE arm design!

- NEW All-Vehicle Arms
- Original "Double S" column design
- Performance tested to 20K lift cycles
- Nationwide support

Customize SPOA10-AV series lifts to fit the needs of your shop with:

- Lift height
- Power option
- Lift accessories

AVAILABLE WITH SHOCKWAVE™ POWER

Supercharged SHOCKWAVE™ Equipped Rotary Lifts:
The World's Fastest Lifts – only available from Rotary!

Twice as fast than any other standard service lift, Shockwave-equipped lifts help achieve your goals of greater technician productivity and higher profits.

Designed specifically for service speed, Shockwave helps you keep step with the everchanging demands in the vehicle service industry.

Watch your productivity increase, the number of service orders increase and be shocked at the increase in revenue!



WATCH THIS TESTIMONIAL TO LEARN MORE!

SPECIFICATIONS

BL = Blue / RD = Red

LIFT MODELS

ALL-VEHICLE ARMS

Standard with round & truck adapters

STANDARD POWER

SPOA10N20M0BL
SPOA10N20M0RD

SHOCKWAVE EQUIPPED

SPOA10U20M5BL
SPOA10U20M5RD

MAX RISE*	STANDARD SHOCKWAVE	81 1/2" 84 1/2"
Overall Height		11' 11 1/2" With SHOCKWAVE Power: 12' 5 1/2"
Overall Width		11' 5 1/2"
Drive-Thru Clearance		95 1/4"
Inside Columns		107 1/4"
Front Arm Reach: Min/Max		18 1/2" / 41"
Rear Arm Reach: Min/Max		27 5/8" / 58 1/4"
Min Adapter Height		3 3/8"
Speed of Rise		Standard Power: 45 seconds With SHOCKWAVE Power: 25 seconds**
Speed of Descent		Standard Power: 40 seconds With SHOCKWAVE Power: 19 seconds**
Ceiling Height Minimum		12' / 12' 6" with SHOCKWAVE Power
Min. Bay Size		12' x 24'

* Rise measures the highest position of the adjustable adapters with use of supplied adapter extensions from floor to full cylinder stroke.

**Actual rise and descent times vary depending on vehicle weight.

Heights and widths reflect standard settings. 2 post lift colors come standard with your choice of red or blue.

LT33A

AIR-HYDRAULIC LIFT TABLE
3,300 lb. Capacity

SERVICE ELECTRIC VEHICLES SAFELY

Rotary's NEW LT33A lift table is designed to service batteries on hybrid and electric vehicles. Give your service options a lift!



SCAN TO VIEW PRODUCT VIDEO



Rotary is the world leader in service bay solutions offering a broad range of equipment and accessories to make any service bay safer and more productive.

For a complete guide to our product offering or to contact your local distributor, visit us at www.rotarylif.com today.

If you need assistance or have questions, we're here to help:

800.445.5438 / Sales: insidesales@vsgdover.com / Support: technicalsupport@rotarylif.com



ROTARY

2700 Lanier Drive
Madison, IN 47250, U.S.A.

Lit# SPOA10AV SERIES Brochure.2023.10

©2023 VEHICLE SERVICE GROUP
All Rights Reserved. Unless otherwise indicated, ROTARY, VEHICLE SERVICE GROUP, DOVER and all other trademarks are property of Dover Corporation and its affiliates. Printed in U.S.A.

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.